


Contact arrangement for 8, 16, 20, 25, 34, 50 pos.

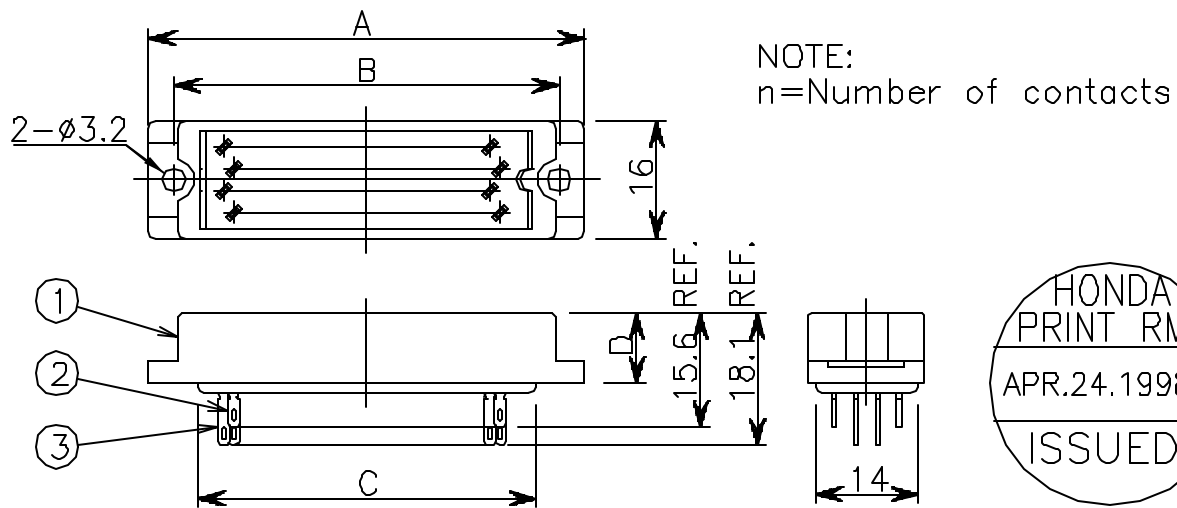

Contact arrangement for 60 pos.

Part No.	n1	n2	A	B	C	D	E	F	G
MR-8M	6	2	22.4	17.4	11.9	10.0	12.4	11.5	ø2.8
MR-16M	12	4	30.2	25.2	19.7	9.6	20.2		
MR-20M	14	6	32.8	27.8	22.3		22.8		
MR-25M	18	7	38.0	33.0	27.5		28.0		
MR-34M	24	10	45.8	40.8	35.3		35.8		
MR-50M	36	14	61.4	56.4	50.9		51.4		
MR-60M	30	30	59.6	52.6	46.3		46.8	14.5	ø3.2

				3	Contact(Long)	Brass	n2	Silver plated	———
				2	Contact(Short)	Brass	n1	Silver plated	———
				1	Insulator	epoxy phosphate resin	1	———	———

LTR.	DATE	BY	REV.	DESCRIPT	NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE
------	------	----	------	----------	-----	-----------	----------	-----	--------	------

DATE	SCALE	UNIT	3RD . A . P	HONDA TSUSHIN KOGYO., LTD.						
APR.23 1998	1/1	mm								

DR	DE	CHK	CHK	APP.	NAME	MR Series male connector Soldering type				
					PART NO.	MR-(n)M				