



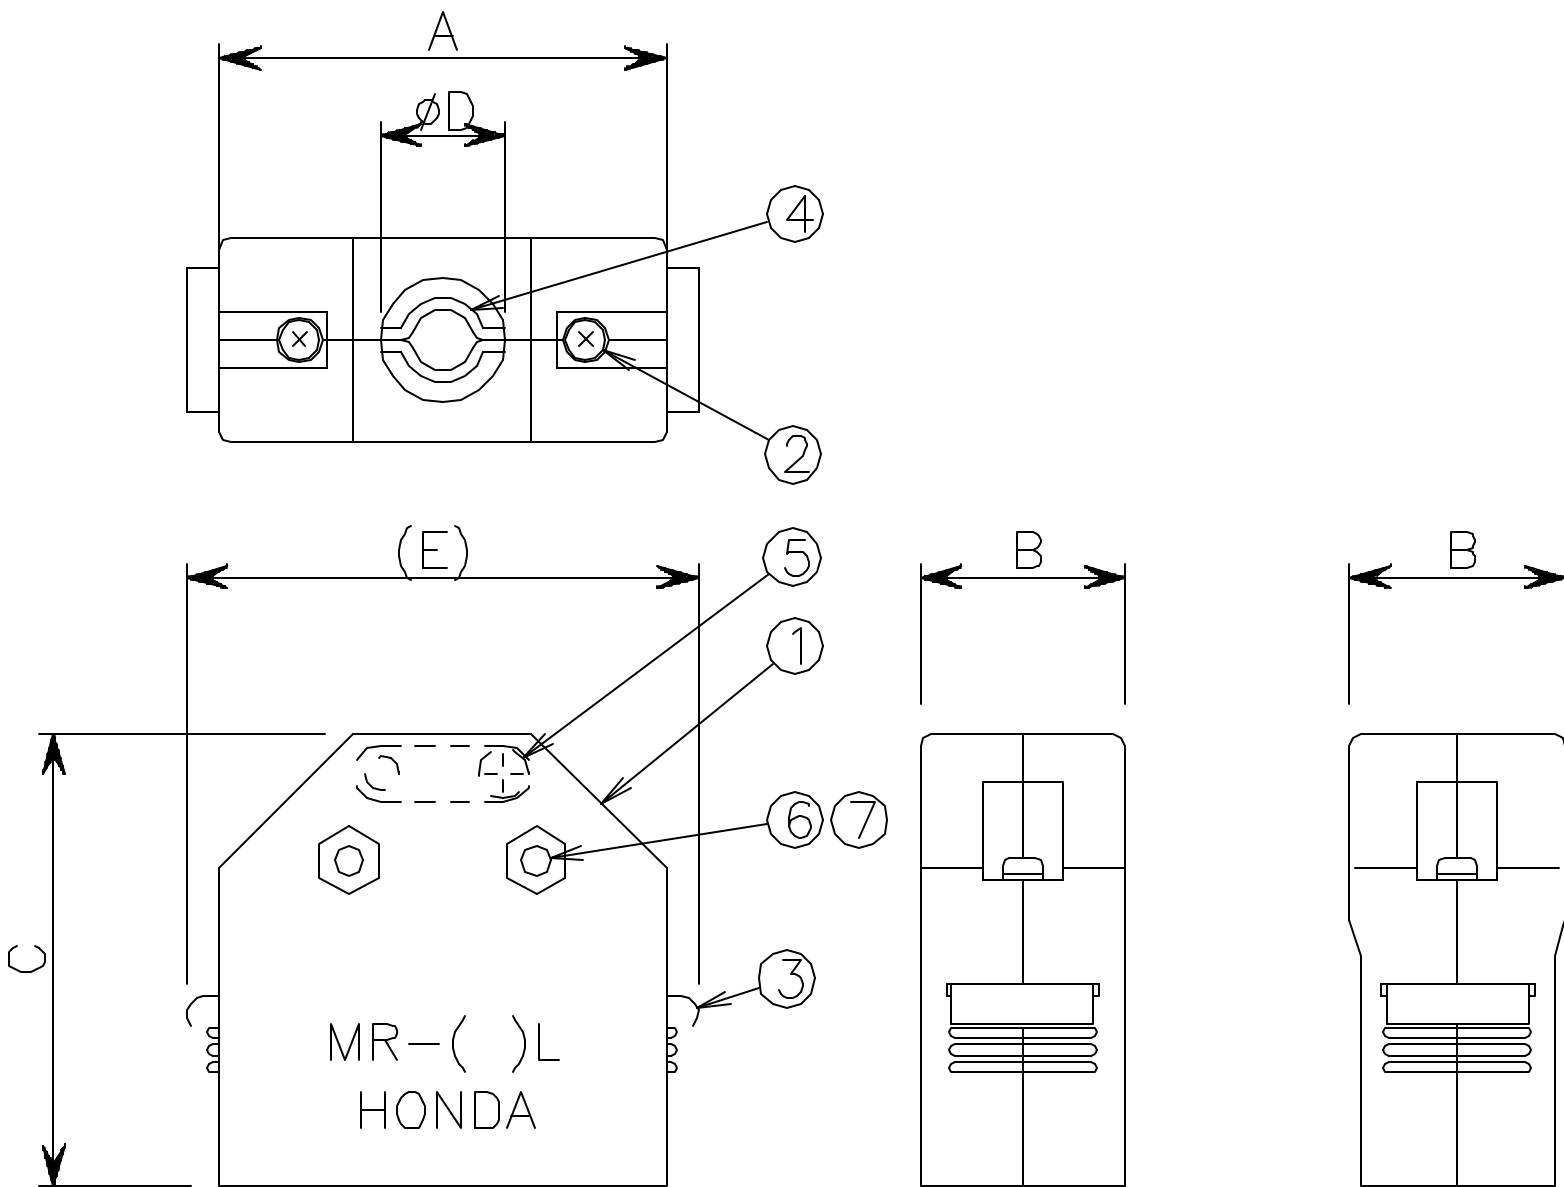

When MR-8L is used

Part No.	NO. of pos.	A	B	C	∅D	E (ref.)
MR— 8L	8	31	19	39.8	11	(36.6)
MR—16L	16	36.7	18		9	(42.3)
MR—20L	20	39.3			11	(44.9)
MR—25L	25	44.5		40.5	13.5	(50.1)
MR—34L	34	52.3			15	(57.9)
MR—50L	50	67.9		44.8	16	(73.5)

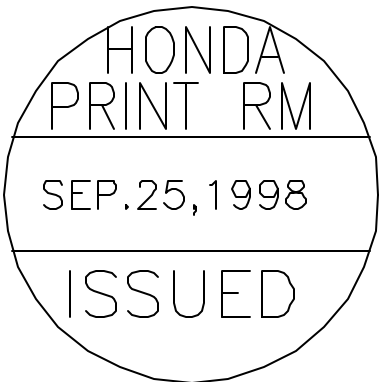

NOTE1.Both spring-lock and screw-lock can be used

				7	NUT	STEEL	2	NICKEL PLATED	M2.3orM2.6			
				6	SCREW	STEEL	2	NICKEL PLATED	M2.3orM2.6			
				5	SCREW	STEEL	2	NICKEL PLATED	M2orM2.3			
				4	CABLE CLAMP	STEEL	2	ZINC CLOMATE	————			
				3	Spring LOCK	STAINLESS STEEL	2	————	————			
				2	SCREW	STEEL	2	NICKEL PLATED	M2			
				1	CASE	ABS	2	————	GRAY			
LTR.	DATE	BY	REV. DESCRIPT	NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE			
DATE Sep.22 (1998)		SCALE 1 / 1		UNIT mm(INCH)		3RD . A . P	HONDA TSUSHIN KOGYO., LTD.					
DR		DE		CHK		CHK		APP.		NAME	Vertical case	
										PART NO.	MR-()L	