

SEC X-X' (5/1)

HONDA
PRINT RM
FEB.05.1998
ISSUED

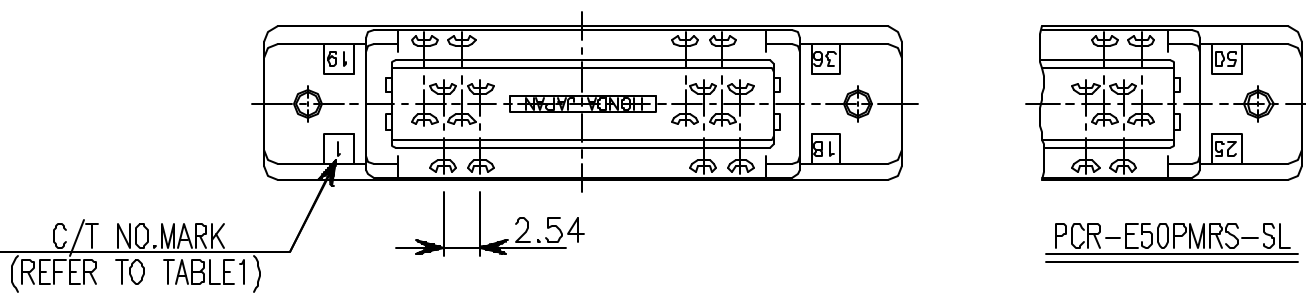


TABLE 1

PART NO.	A	B	C	D	E	F	G	H	I	N	C/T NO.MARK
PCR-E20PMRS-SL	33.40	27.40	13.20	11.43	16.45	21.60	19.40	23.80		20	1,10,11,20
PCR-E28PMRS-SL	38.48	32.48	18.28	16.51	21.53	26.68	24.45	28.88	4.2	28	1,14,15,28
PCR-E36PMRS-SL	43.56	37.56	23.36	21.59	26.61	31.76	29.55	33.96		36	1,18,19,36
PCR-E50PMRS-SL	52.45	46.45	32.25	30.48	35.50	40.65	38.45	42.85	5.2	50	1,25,26,50

6	SPRING WASHER	STEEL	2	Ni PLATING						
5	SCREW LOCK	STEEL	2	Ni PLATING						
4	INSULATOR	PPS	1		UL94V-0 BLACK					
3	INSULATOR	PPS	1		UL94V-0 BLACK					
2	SHELL	ZINC DIE CASTING	1	Ni PLATING						
1	CONTACT	PHOSPHOR BRONZE	N	CONTACT AREA GOLD PLATING	TERMINATION AREA:TIN LEAD					
LTR.	DATE	BY	REV.	DESCRIPT	NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE

DATE	SCALE	UNIT	3RD . A . P	HONDA TSUSHIN KOGYO., LTD.						
FEB.02.1998	2/1	mm(INCH)		DR.	DE.	CHK.	CHK.	APP.	NAME	1.27mm SPACING MALE CONNECTOR FOR SOLDER TYPE
APP. DATE & REV.				PART NO.		PCR-E()PMRS-SL				

PCR-E50PMRS-SL