



CONTACT DETAIL(5/1)

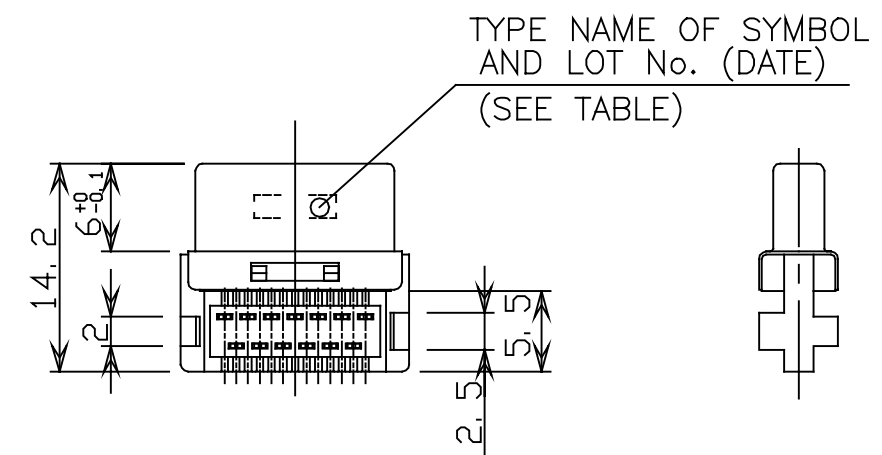

- NOTE 1. CONTACT PLATING
 GOLD 0.76μm MIN. ON MATING AREA,
 TIN/LEAD 2.6~5μm ON TERMINATION AREA,
 ALL OVER NICKEL 1.5μm MIN. UNDERPLATED.
2. APPLICABLE CONNECTOR AND COVER
 HDR-E< >LMY< >G1-SLE, HDR-E< >LP< >
3. ASS'Y TOOLS
 FHAT-0004A: PROTRUDE WIRE CUT
 FHPT-0004A: IDC PRESS
4. SPECIFICATION
 RATED CURRENT 0.5A<PEAK TO PEAK 1A>/1 CONTACT
 RATED VOLTAGE 125V AC<r. m. s.>

PART NO.	APPLICABLE WIRE SIZE	TYPE NAME SYMBOL	CABLE HOUSING COLOR
HDR-E< >FG1	28AWG<7/0.127> INSULATION O. D ∅0.58	FG1	BLACK
HDR-E< >FAG1	30AWG<7/0.1> INSULATION O. D ∅0.58	FAG1	BLACK
HDR-E< >FBG1	32AWG<7/0.08> INSULATION O. D ∅0.44	FBG1	GRAY

HONDA
 PRINT RM
 OCT. -16 1996
 ISSUED

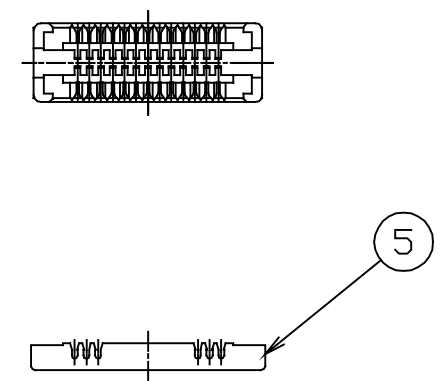

5	CABLE HOUSING	PBT	2	UL 94V-0 SEE TABLE
4	SPACER	PBT	2	UL 94V-0 BLACK
3	INSULATOR	PBT	1	UL 94V-0 BLACK
2	SHELL	STEEL	1	NICKEL PLATING
1	FEMALE CONTACT	PHOSPHOR BRONZE	n	NOTE#1

LTR.	DATE	BY	REV.	DESCRIPT	NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE	
DATE OCT. -16 1996						SCALE 2/1	UNIT mm(INCH)	3RD . A . P			HONDA TSUSHIN KOGYO., LTD.
DR.	DE.	CHK.	CHK.	APP.	NAME		0.8mm SPACING SHIELDED BOARD TO CABLE FEMALE CONNECTOR<IDC>				
						PART NO.	HDR-E< >F< >G1				

HDR-E26F< >G1	15.6	0.8x12=9.6	13.6
HDR-E14F< >G1	10.8	0.8x6=4.8	8.8
PART No.	A	B	C