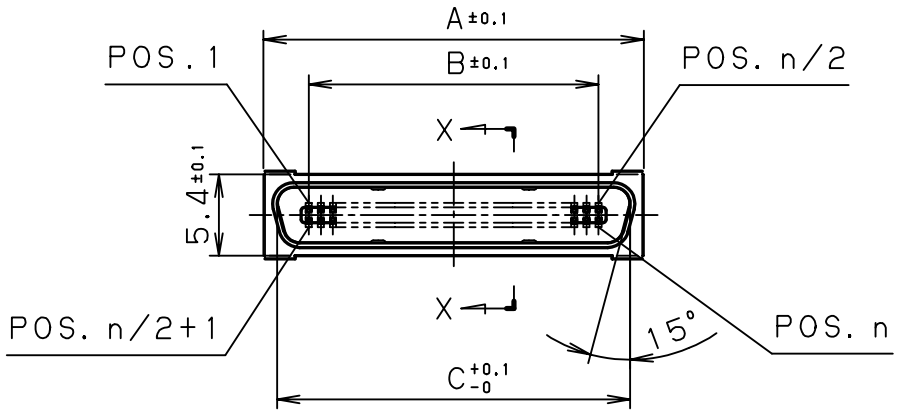

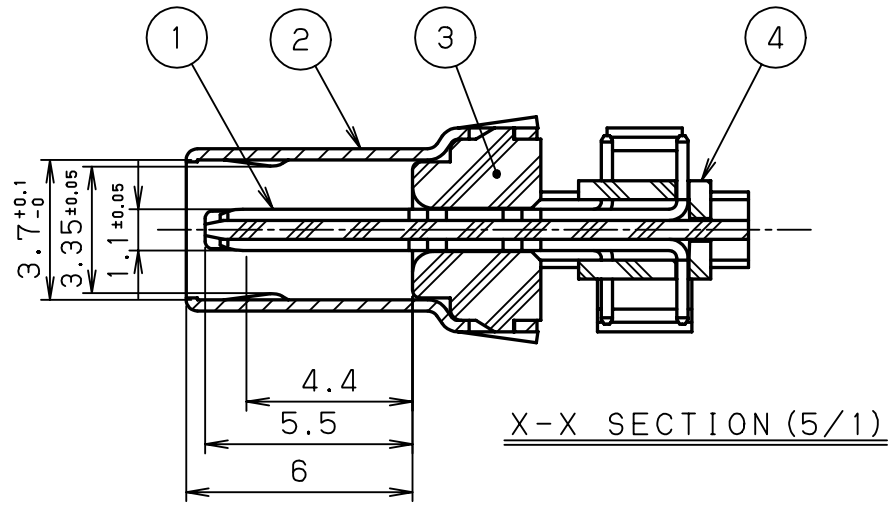

X-X SECTION (5/1)



14POS.



26POS.

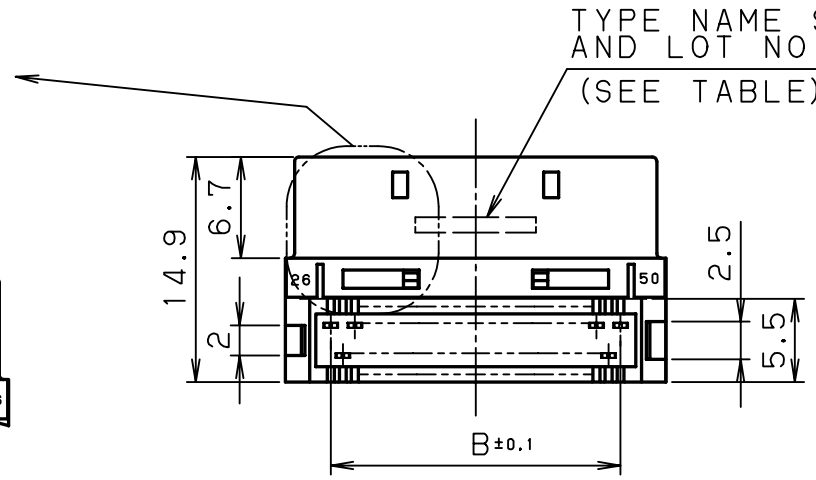

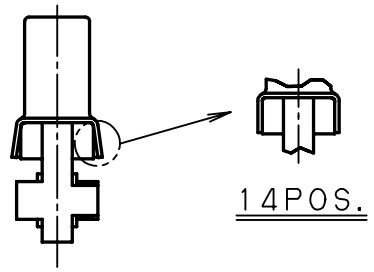



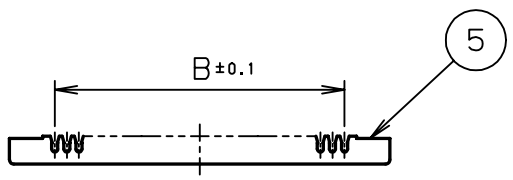

1. CONTACT PLATING
   MATING AREA :0.76 MICRO METERS MINIMUM GOLD PLATING
   TERMINATION AREA :0.05 MICRO METERS MINIMUM GOLD PLATING
   UNDERPLATING:NICKEL PLATING
2. APPLICABLE HOOD
   HDR-E ( ) LP ( )
3. MATING CONNECTOR
   HDR-EA ( ) LFY ( ) G1+
   HDR-EC ( ) LFD ( ) +
4. ASSEMBLY TOOLS
   WIRE ARRANGING TOOL:FHAT 0029
   IDC PRESS TOOL:FHPT 923B
5. SPECIFICATION
   RATED CURRENT 0.5A
   RATED VOLTAGE 125V AC (r. m. s.)

PART NO.	APPLICABLE WIRE SIZE	SYMBOL	CABLE HOUSING COLOR
HDR-E ( ) MG1+	28AWG (7/0.127) INSULATION O.D Ø0.58	MG1:50 POS. G1:14, 26 POS.	BLACK
HDR-E ( ) MAG1+	30AWG (7/0.1) INSULATION O.D Ø0.58	MAG1:50 POS. AG1:14, 26 POS.	BLACK
HDR-E ( ) MBG1+	32AWG (7/0.08) INSULATION O.D Ø0.44	MBG1:50 POS. BG1:14, 26 POS.	GLAY
⚠1 HDR-E ( ) MBAG1+	32AWG (7/0.08) INSULATION O.D Ø0.58	MBG1:50 POS. BG1:14, 26 POS.	BLACK

PART NO.	n NO. OF POS.	DIMENSION A	DIMENSION B	DIMENSION C
HDR-E50M ( ) G1+	50	25.2	0.8×24=19.2	23.4
HDR-E26M ( ) G1+	26	15.6	0.8×12=9.6	13.8
HDR-E14M ( ) G1+	14	10.8	0.8×6=4.8	9.0

LTR.	DATE	BY	REV. DESCRIPT
⚠3			
⚠2			
⚠1	Jun.23 2005	Y.K	REVISED

No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
5	CABLE HOUSING	PBT	2	——	UL94V-0 SEE TABLE
4	SPACER	PBT	2	——	UL94V-0 BLACK
3	INSULATOR	PBT	1	——	UL94V-0 BLACK
2	SHELL	STEEL	1	NICKEL PLATING	——
1	MALE CONTACT	PHOSPHOR BRONZE	n	NOTE#1	——

DATE	SCALE	UNIT	3RD. A. P
Mar.29.2004	2 / 1	mm (INCH)	

APP. DATE&REV.

DR.	DE.	CHK.	CHK.	APP.
Y.KATO	Y.KATO	——	C.NUNOKAWA	H.EBIHARA

HONDA TSUSHIN KOGYO CO., LTD.

NAME	0.8mm SPACING SHIELDED BOARD TO CABLE MALE CONNECTOR (IDC)	
PART NO.	HDR-E ( ) M ( ) G1+	REV. 1A

ID= HDR-E@M@G1+ EA