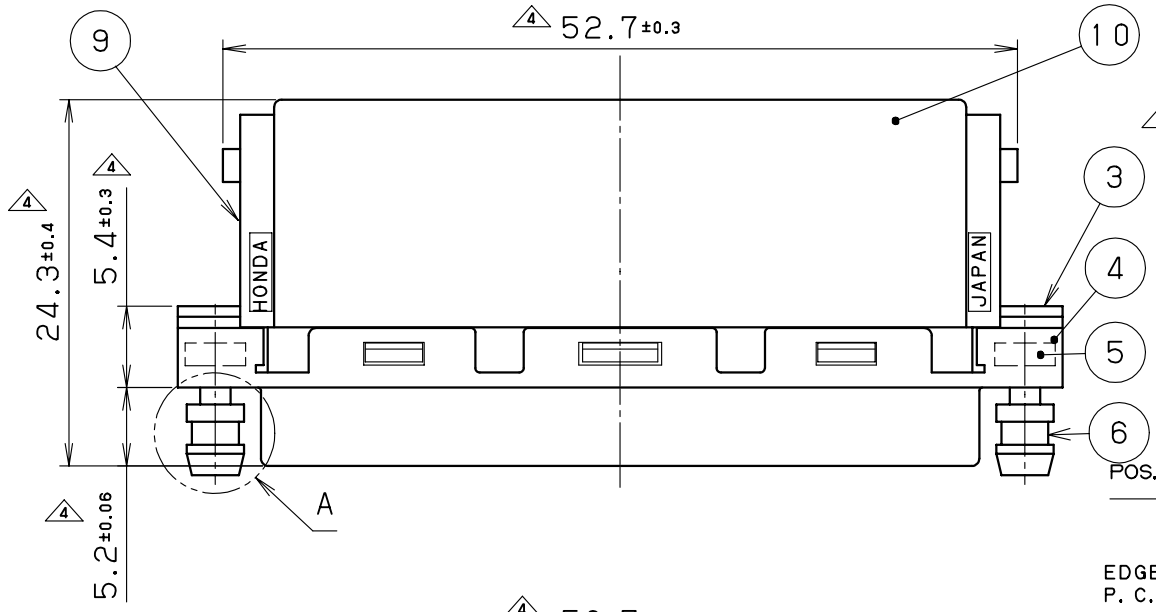

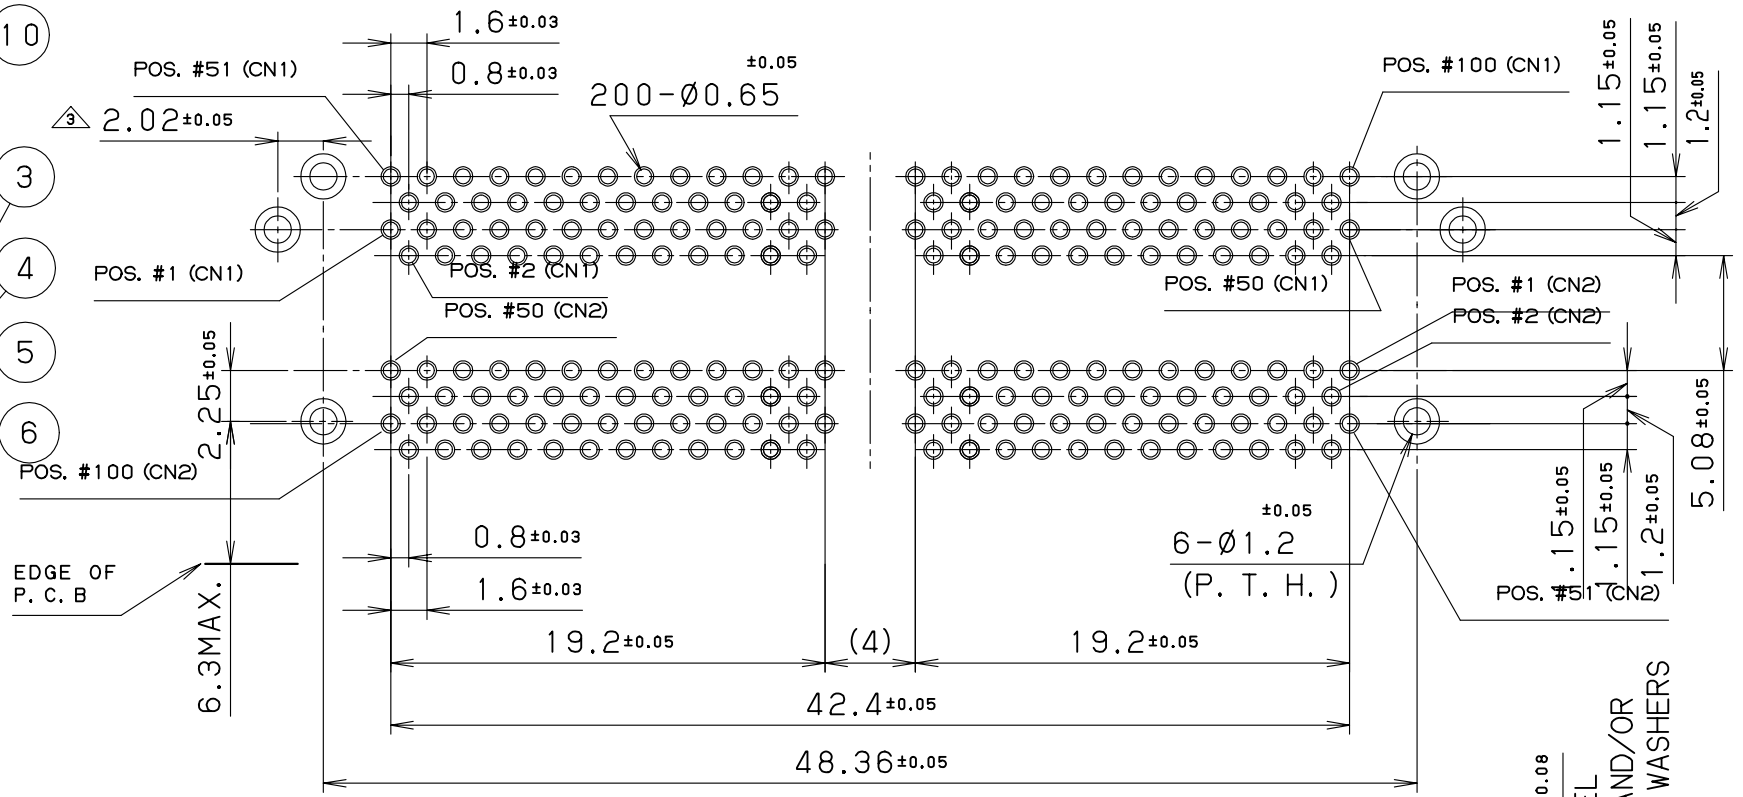

RECOMMNENDED P. C. B. LAYOUT
(MOUNT SIDE VIEW)
(SCALE=5/1)

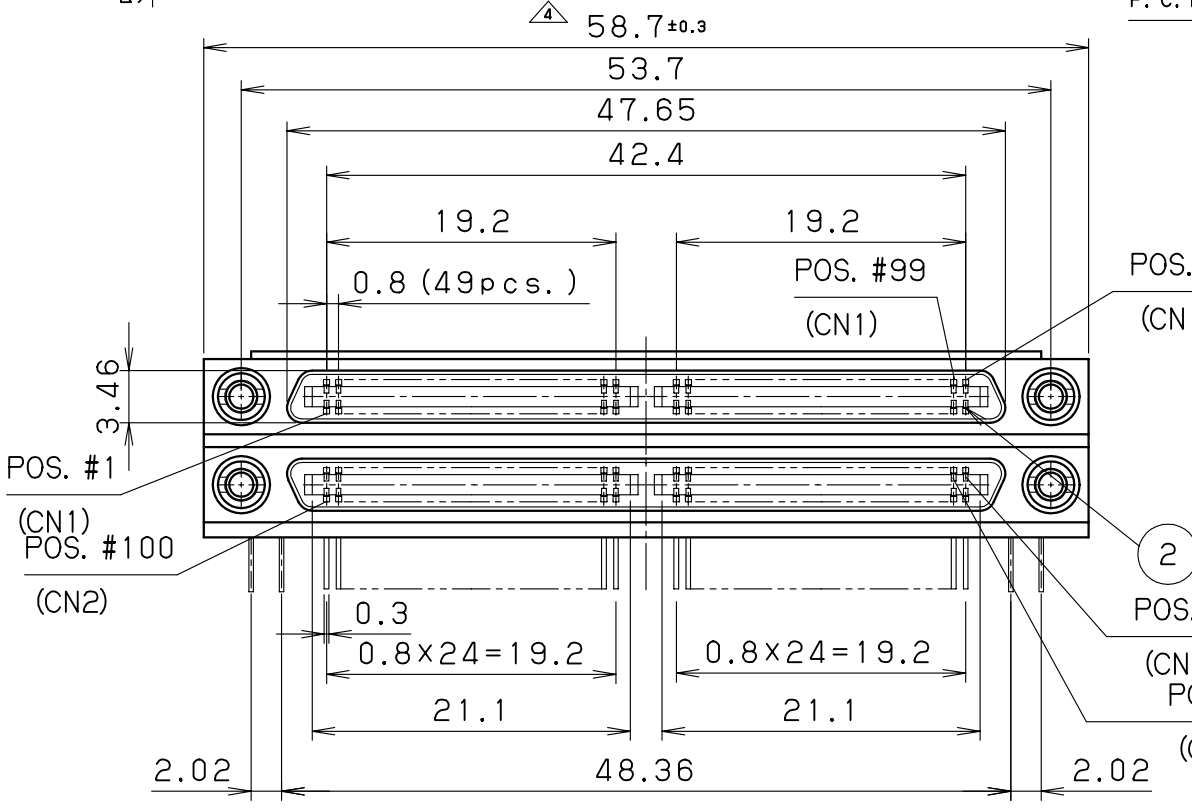

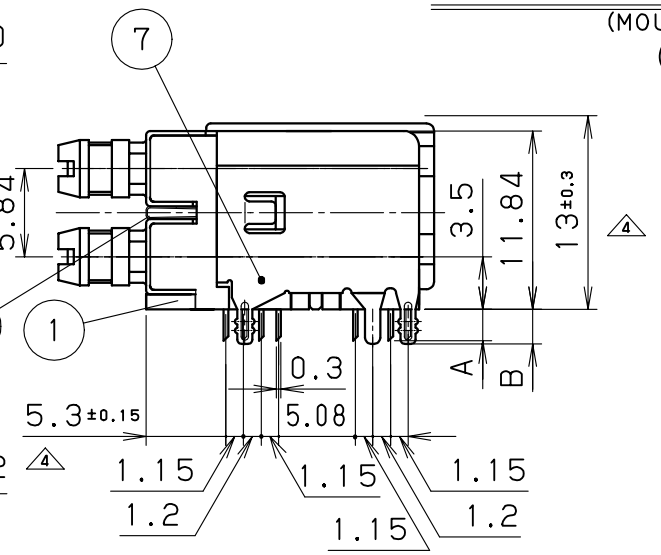

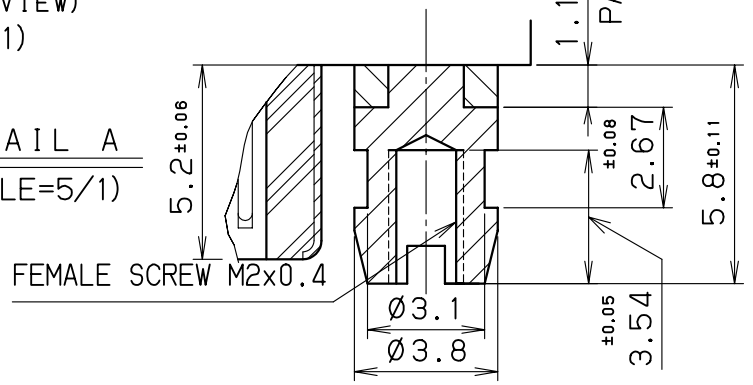

NOTE1.CONTACT PLATING
CONTACT AREA:Pd/Ni0.5μm
+GOLD0.1μmMIN.
TERMINAL AREA:TIN/LEAD2.6~5μm
ALL OVER NICKEL UNDERPLATED

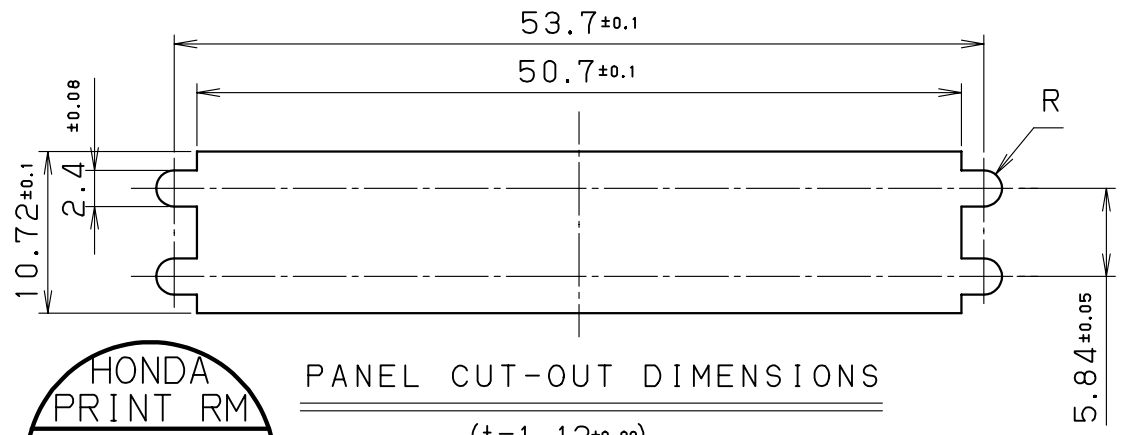

PANEL CUT-OUT DIMENSIONS
(t=1.12±0.08)

	PART No.	A	B	P.C.B THICKNESS	COLOR OF BRACKET
2	HDRA-E100W2LFDT1EC-SL	3.4	3.6	2.4	BROWN
2	HDRA-E100W1LFDT1EC-SL	2.08	2.28	1.6	BLACK

LTR.	DATE	BY	REV. DESCRIPT
4	FEB.17 2000	K. K	ADDED TOLERANCE
3	JUL.29 1999	K. K	ADDED TOLERANCE
2	JUL.28 1999	K. K	CHANGE PART No.
1	JUL.23 1999	K. K	REVISE

No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
10	PROTECT COVER	PPS	1		UL94V-0 BLACK
9	INSULATOR B	LCP	2		UL94V-0 BLACK
8	SPACER	STAINLESS STEEL	1	NICKEL	
7	BOARD LOCK	PHOSPHOR BRONZE	2	NICKEL	
6	SCREW LOCK	STEEL	4	NICKEL	
5	SQR. NUT	BRASS	4	NICKEL	M2x0.4
4	SHELL	STEEL	2	NICKEL	
3	INSULATOR A	PPS	1		UL94V-0 BLACK
2	CONTACT	PHOSPHOR BRONZE	200	SEE NOTE 1	
1	BRACKET	PPS	1		UL94V-0

HONDA PRINT RM
APR.27.2001
ISSUED

DATE	SCALE	UNIT	
AUG.03.1998	2/1	mm (INCH)	3RD. A. P

APP. DATE&REV.

DR.	DE.	CHK.	CHK.	APP.

HONDA TSUSHIN KOGYO CO., LTD.

NAME	0.8mm SPACING 100POS. R/A DUAL STACKING FEMALE CONNECTOR
PART NO.	HDRA-E100W( )LFDT1EC-SL 4 2
REV.	4F

HDRA-E100W@LFDTZ-SEF